

## 800 Series

### Plug-in Detector



#### Models Available

881 Ionization Detector

882 Photoelectronic Detector

885 Heat Detector

#### General Description

The 800 series are 2-wire conventional low profile detectors. It is a low cost and high reliability series. A LED will be latched on to locally indicate alarm. The (-) in and (-) out terminals are short-circuited inside the detectors. When the detector is mounted it will continue the wire to the next device or EOL resistor. When it is removed, the wire will be open for wiring supervision.

**881** Model 881 is a 2-wire conventional ionization smoke detector that uses a state-of-the-art sensing chamber. These detectors are designed to provide open area protection and to be used with compatible listed control panels only.

**882** Model 882 is a 2-wire conventional photoelectronic smoke detector that use a state-of-the-art optical sensing chamber. This detector is designed to provide open area protection and to be used with compatible panels only.

**885** Model 885 is a 2-wire conventional fixed temperature heat detector. These detectors are designed to provide open area protection and to be used with compatible listed control panels only.

The 800 series are UL listed.

#### Specifications


##### Size

Height (With base):	5.5 cm (Ionization), 4.8cm (Heat), 5.0cm (Photoelectronic)
Diameter:	10.2 cm
Operating Temperature Range:	32° to 100°F (0° to 38°C) for heat, 32° to 120°F (0° to 49°C) for Ionization, photoelectronic
Operating Humidity Range:	5%-95% RH
Latching Alarm:	Reset by momentary power interruption
Max Air Velocity:	4000ft/min (Photoelectronic), 2000ft/min (Ionization)
Operating Voltage:	15 ~ 30VDC
Standby Current:	< 50 $\mu$ A
Alarm Current:	min 2mA @ 3.1VDC max 80mA @ 6.5VDC
Maximum Ripple Voltage:	4 Volts peak to peak
Sensitivity:	145°F (63°C) heat only


This document is not intended to be used for installation purposes.

A05-111-01C

## Mounting Bracket For 800 Series Smoke Detector

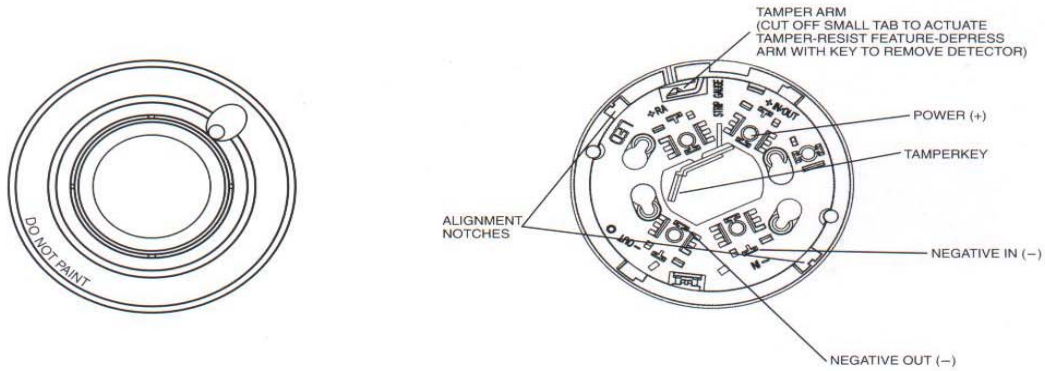

## Wiring Diagram For 800 Series Detector

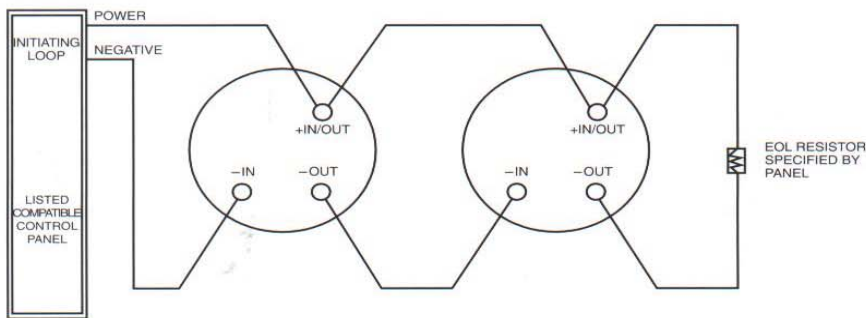

## System Sensor Worldwide Manufacturing & Distribution

**System Sensor Headquarters**  
 3825 Ohio Avenue  
 St. Charles, IL 60174  
 Ph: 800-SENSOR2  
 Fx: 630/377-6495

Documents on Demand:  
 1-800-736-7672 x 3  
 Web: www.systemsensor.com

**System Sensor in China**  
 Ph: ++ 86.29.524.6253  
 Fx: ++ 86.29.524.6259  
 Web: www.systemsensor.com.cn

**System Sensor in Europe**  
 Ph: ++ 44.1403.276500  
 Fx: ++ 44.1403.276501

**System Sensor in Canada**  
 Ph: ++1.905.812.0767  
 Fx: ++1.905.812.0771

**System Sensor in Singapore**  
 Ph: ++ 65.273.2230  
 Fx: ++ 65.273.2610

**System Sensor - Far East**  
 Ph: ++ 852.2191.9003  
 Fx: ++ 852.2736.6580

**System Sensor- Australia**  
 Ph: ++ 613.54.281.142  
 Fx: ++ 613.54.281.172